



mex+1012WCC
Newest generation of wireless and portable DR flat panel

- Lightweight Only 1,7kg (incl. battery)
- **Superb Image Quality** by low dose with Csl-Scintilator
- Water-Resistant Protection against water impact (IPX6)
- AP (Access Point) Mode Direct wireless communication between detector and workstation
- OLED Display Indication of panel, connection and battery status
- Long-Term Operation Up to 4 hours with one battery
- Durability 300kg load capacity

meX+1012WCC - Wireless DR system

Complete wireless and perfect equine solution in combination with hybrid-powered portable X-ray.



Highest Mobility due to light-weight carrying bag for save and pleasing transportation.


meX+ Image Acquisition Software

- · Simple and perfect images at all time
- Integrated automatic image optimization
- Touchscreen function for easy operating
- Fully integrated radiographic positioning guide
- Bones and soft tissue in one image
- Including Patient CD and DICOM Send function
- Adaption of almost every language possible
- Modern graphical user interface
- Safe and fast registration of emergency patients
- Entry of recurring examination procedures as macros



Specifications

Interface	AED (Automatic Exposure Detection)		
Sensor Type	Amorphous Silicon with TFT		
Dimensions	328 x 268 x 15 mm		
Active Pixel Area	293 mm x 228 mm		
Weight	1,7 kg (incl. battery)		
Pixel Number	2264 x 1752 pixels		
Pixel Pitch	127 μm		
Resolution	3,9 lp/mm		
Energy Range	40 - 150 kV		
A/D Conversion	14/16 bits		
Image Acquisition Time	7 sec. (Preview 2 sec.)		
Battery type	Lithium ion battery (3500 mAh)		
Running Time	up to 4 hours with one battery		
Scintillator	Cesium-lodide (CsI)		
Including	2 Batteries & DR Carrying Bag		

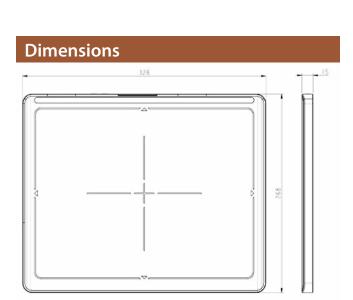



Im Erlengrund 20, 46149 Oberhausen - Germany

t: +49 (0) 208 377 890-0 info@medical-econet.com f: +49 (0) 208 377 890-55 www.medical-econet.com facebook.com/medicaleconetgermany twitter.com/medicaleconet

Distributor		