



PXP-40 HF PXP-60 HF

- Universal units for radiography application for small animal and equine
- Light weight and compact size
- Constant X-ray output without influence of line power fluctuation
- Equipped with new remote control functions
- Flat touch panel, digital display, LED display reverse
- 8 pre-set technique slots (PROM memory)




medical **ECONET**
GERMANY

Specifications

Model	PXP - 40 HF	PXP - 60 HF
Output		
Tube Vol./Current	100 kV/35 mA	100 kV/60 mA
Voltage range	40 - 100 kV in 1 kV steps	40 - 100 kV in 1 kV steps
mAs Range	0.4 mAs - 100 mAs 25 steps	0.4 mAs - 100 mAs 25 steps
Max. output	2.4 kW at 80 kV	3.2 kW at 80 kV
X-ray Tube		
Application	Toshiba D - 124	Toshiba D - 205B
Focal Spot	1.2 mm	2.0 mm
HU capacity	20 kHU	40 kHU
Cooling rate	250 HU/sec	378 HU/sec
Collimator		
Min. Light field: 5 cm x 5 cm @ 1 m SID		
Max. Light field: 35 cm x 35 cm @ 65 cm SID		
Lamp	LED	LED
Auto Timer	30 sec.	30 sec.
SID scale length	2 m	2 m
Laser Pointer	built-in laser beam	built-in laser beam
Power		
Input	110/220 VAC	220-240 VAC
Frequency/phase	50/60 Hz, single phase	50/60 Hz, single phase
Voltage comp.	± 10 %	± 10 %
Features		
7 - segment LED read out reversible, Hand switch remote control function		
PROM Memory	8 APR	8 APR
Weight	12,8 kg	14,6 kg
Dimensions	250 x 195 x 355 mm	250 x 195 x 355 mm

Dimensions

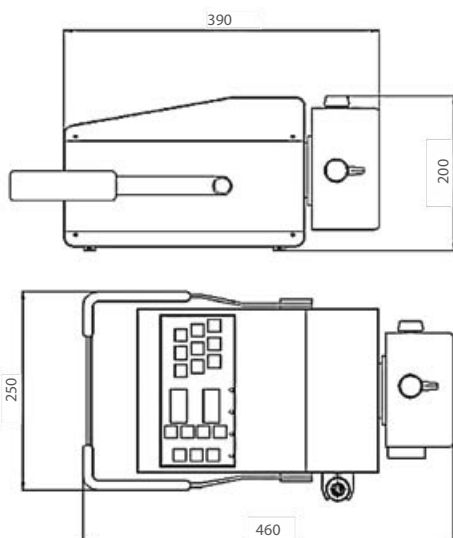

medical **ECONET**
GERMANY

Welcome to healthcare

Im Erlengrund 20, 46149 Oberhausen - Germany

t: +49 (0)208 / 377 890 - 0 info@medical-econet.com
f: +49 (0)208 / 377 890 - 55 www.medical-econet.com
facebook.com/medicaleconetgermany
twitter.com/medicaleconet

Optional Accessories

PXMS - 1800 Mobile Stand



Veterinary X-ray Table TKF



Standard Accessory

Aluminium Carrying Case



CE 1293

Distributor

*All specifications are subject to change without notice.